


Part Number: EST-FS3535RGBW-96-24-Y

Model	Wave lengths Color temp.	LM/M	Power/M	LED/M	FPC copper
EST-FS3535RGBW-96-24-Y	RGB 1800-6500 K K	1210LM	<23W	96LEDs(RGB) 96LEDs(WHITE)	3OZ




Controller

Product No.	Description
4.02.126	5-24VDC 5A*4CH Max.20A 204W/480W(12V/24V)

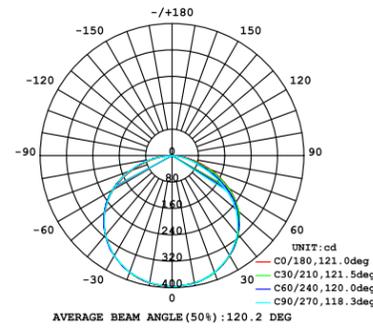

Strip length: CE:500CM UL:11.39FT

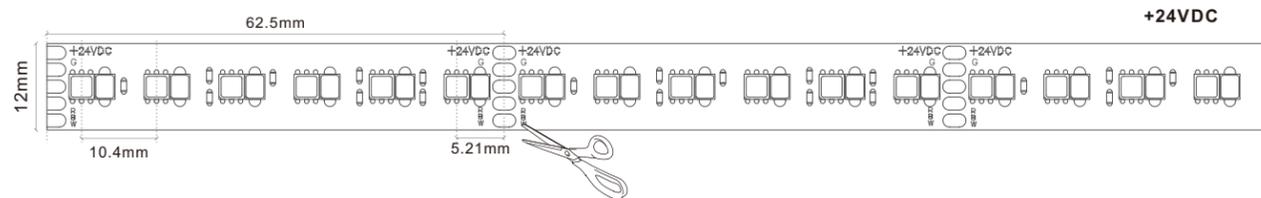

AL. profiles (mm)

IP Rating:

- IP20---Non waterproof
- IP54---Nano coated
- IP65---Silicon coated
- IP67---Silicon coated & Wrapped heat shrink tube
- IP67---PVC extrusion
- IP67---Silicon extrusion
- IP67---Silicon tube(transparent)
- IP68---Silicon tube(transparent) & Inject silicon glue


Part Number: EST-FS3528RGBW-240-24-Y

Model	Wave lengths Color temp.	LM/M	Power/M	LED/M	FPC copper
EST-FS3528RGBW-240-24-Y	620-625 NM NM 517-522 NM NM 465-470 NM NM 2700-6500 K K	800LM	<19.2W	60LEDs(R) 60LEDs(G) 60LEDs(B) 60LEDs(W)	3OZ




Controller

Product No.	Description
4.02.126	5-24VDC 5A*4CH Max.20A 204W/480W(12V/24V)

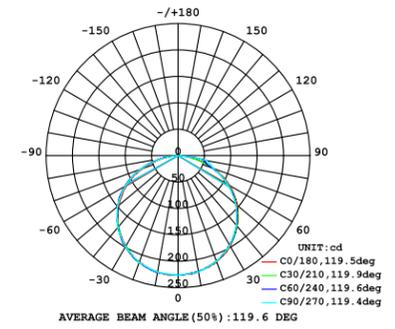

Strip length: CE:500CM UL:16.4FT

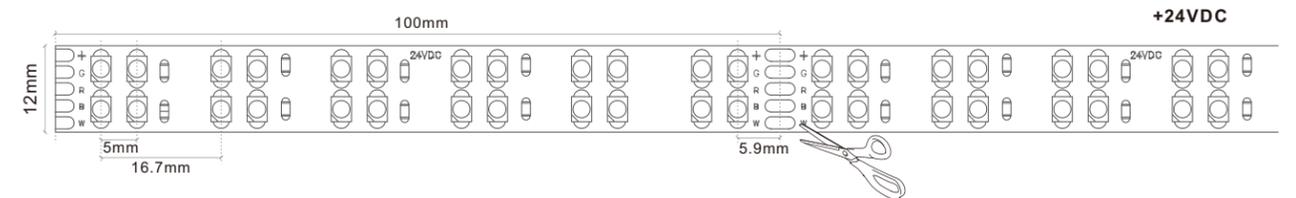

AL. profiles (mm)

IP Rating:

- IP20---Non waterproof
- IP54---Nano coated
- IP65---Silicon coated
- IP67---Silicon coated & Wrapped heat shrink tube
- IP67---PVC extrusion
- IP67---Silicon extrusion
- IP67---Silicon tube(transparent)
- IP68---Silicon tube(transparent) & Inject silicon glue


Part Number: EST-FS5050RGBW-96-24-Y

Model	Wave lengths Color temp.	LM/M	Power/M	LED/M	FPC copper
EST-FS5050RGBW-96-24-Y	620-627 NM NM	920LM	<23W	48LEDs(RGB) 48LEDs(W)	3OZ
	525-530 NM NM				
	470-475 NM NM				
	2700-6500 K K				




Controller

Product No.	Description
4.02.126	5-24VDC 5A*4CH Max.20A 204W/480W(12V/24V)

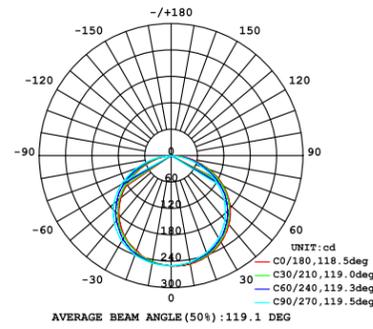


Strip length: CE:500CM UL:13.12FT

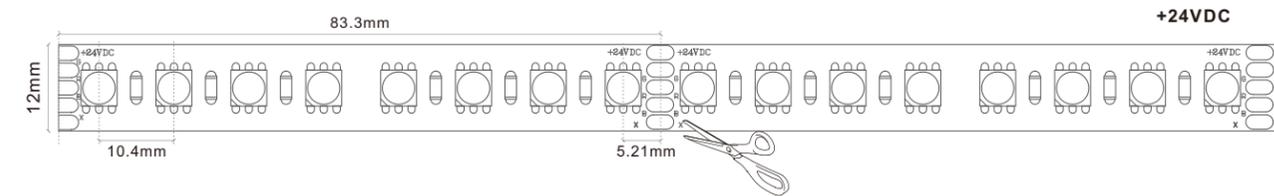

IP Rating:

- IP20---Non waterproof
- IP54---Nano coated
- IP65---Silicon coated
- IP67---Silicon coated & Wrapped heat shrink tube
- IP67---PVC extrusion
- IP67---Silicon extrusion
- IP67---Silicon tube(transparent)
- IP68---Silicon tube(transparent) & Inject silicon glue



AL. profiles (mm)


Part Number: EST-FS5050RGBW-96H-24-Y

Model	Wave lengths Color temp.	LM/M	Power/M	LED/M	CRI (Ra)	FPC copper
EST-FS5050RGBW-96H-24-Y	RGB	967LM	<23W	96LEDs	90+	3OZ
	3000K					
	4000K 6500K					




Controller

Product No.	Description
4.02.126	5-24VDC 5A*4CH Max.20A 204W/480W(12V/24V)

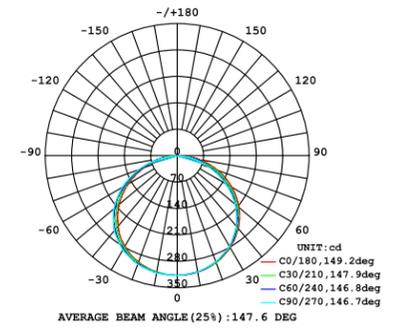


Strip length: CE:500CM UL:13.12FT

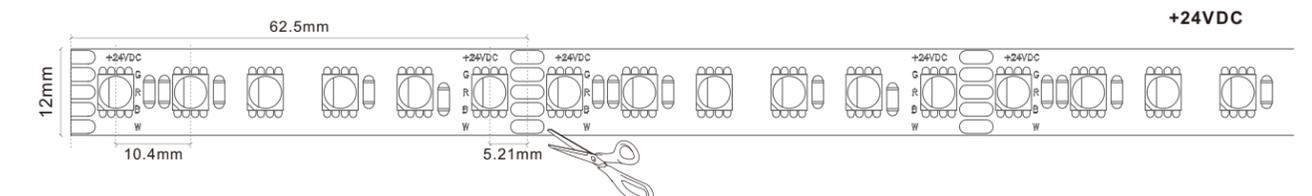

IP Rating:

- IP20---Non waterproof
- IP54---Nano coated
- IP65---Silicon coated
- IP67---Silicon coated & Wrapped heat shrink tube
- IP67---PVC extrusion
- IP67---Silicon extrusion
- IP67---Silicon tube(transparent)
- IP68---Silicon tube(transparent) & Inject silicon glue



AL. profiles (mm)

RGBW Series


Part Number: EST-FS5050RGBW-60-24-Y
Part Number: EST-FS5050RGBW-60-12-Y

Model	Wave lengths Color temp.	LM/M	Power/M	LED/M	FPC copper
EST-FS5050RGBW-60-24-Y	RGB 2700-6500 K	780LM	<14.4W	60LEDs	3OZ




Controller

Product No.	Description
4.02.126	5-24VDC 5A*4CH Max.20A 204W/480W(12V/24V)

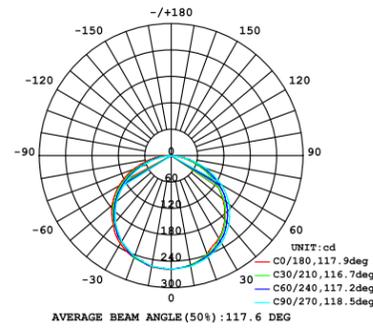

Strip length: CE:500CM UL:22.63FT(24V) | 13.12FT(12V)

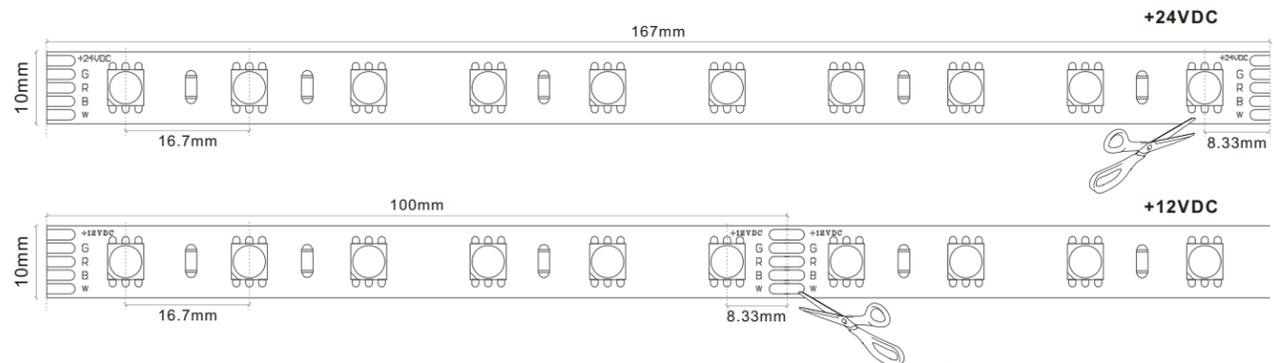


AL. profiles (mm)

ES-LL017009	ES-LL024011	ES-LL017015	ES-LL013006
ES-LL023009	ES-LL030011	ES-LL023015	ES-LL013012
ES-LL016016	ES-LL020020-1	ES-LL025019	ES-LL025025
ES-LL030030	ES-LL010015	ES-LL025016	
ES-LL057011	ES-LL064014		

IP Rating:

- IP20---Non waterproof
- IP54---Nano coated
- IP65---Silicon coated
- IP67---Silicon coated & Wrapped heat shrink tube
- IP67---PVC extrusion
- IP67---Silicon extrusion
- IP67---Silicon tube(transparent)
- IP68---Silicon tube(transparent) & Inject silicon glue



RGBW Series


Part Number: EST-FS5050RGBW-60H-24-Y

Model	Wave lengths Color temp.	LM/M	Power/M	LED/M	CRI (Ra)	FPC copper
EST-FS5050RGBW-60H-24-Y	RGB 3000K 4000K 6500K	643LM	<14.4W	60LEDs	90+	3OZ




Controller

Product No.	Description
4.02.126	5-24VDC 5A*4CH Max.20A 204W/480W(12V/24V)

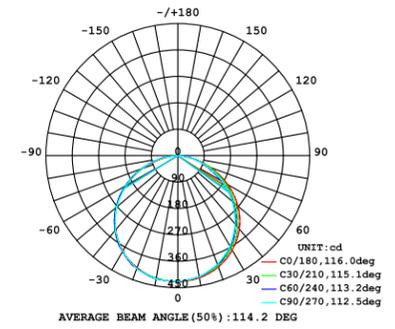

Strip length: CE:500CM UL:22.63FT

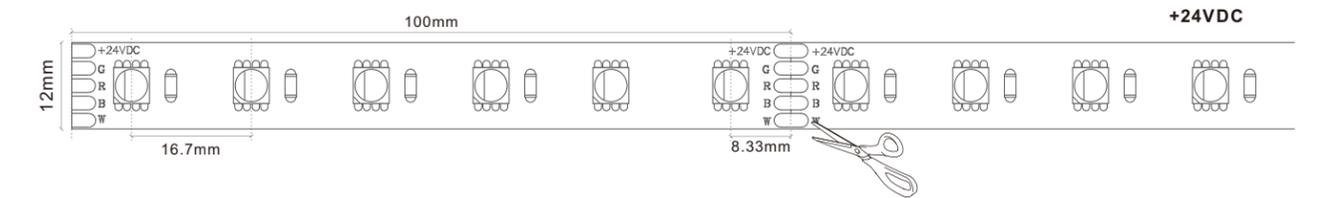

AL. profiles (mm)

ES-LL017009	ES-LL024011	ES-LL017015	ES-LL013006
ES-LL023009	ES-LL030011	ES-LL023015	ES-LL013012
ES-LL016016	ES-LL020020-1	ES-LL025019	ES-LL025025
ES-LL030030	ES-LL010015	ES-LL025016	
ES-LL057011	ES-LL064014		

IP Rating:

- IP20---Non waterproof
- IP54---Nano coated
- IP65---Silicon coated
- IP67---Silicon coated & Wrapped heat shrink tube
- IP67---PVC extrusion
- IP67---Silicon extrusion
- IP67---Silicon tube(transparent)
- IP68---Silicon tube(transparent) & Inject silicon glue

