

S Type(Bendable)

LED Tape Light

Product Features

- 1. RA 90+ (SMD3528) and RA 94+ (SMD2835) for option.
- 2. 12VDC and 24VDC for option.
- 3. High flexibility – adaptable to round shapes.
- 4. Installation with 3M adhesive tape on the strip’s backside (self adhesive).

EST-FS2835C-60-24-Y(S)

① ② ③ ④ ⑤

Color

1800 K	2100 K	2300 K	2700 K	3000 K
	3500 K	4000 K	5000 K	6500 K
				RGB

Input DC Voltage

24VDC | 12VDC

LED Type

SMD2835 | SMD3528

LED Qty.per meter

60



IP Index

IP20 | IP54


Part Number:EST-FS2835C-60-24-Y(S)
Part Number:EST-FS2835C-60-12-Y(S)

Model	Color temp.	LM/M	Power/M	CRI (Ra)	FPC copper
EST-FS2835WW-60-24-Y(S)	1800K	700LM	<12W	94+	2OZ
EST-FS2835WW-60-24-Y(S)	2100K	700LM	<12W	94+	2OZ
EST-FS2835WW-60-24-Y(S)	2300K	720LM	<12W	94+	2OZ
EST-FS2835WW-60-24-Y(S)	2700K	780LM	<12W	94+	2OZ
EST-FS2835WW-60-24-Y(S)	3000K	7800LM	<12W	94+	2OZ
EST-FS2835WW-60-24-Y(S)	3500K	800LM	<12W	94+	2OZ
EST-FS2835NW-60-24-Y(S)	4000K	840LM	<12W	94+	2OZ
EST-FS2835NW-60-24-Y(S)	5000K	840LM	<12W	94+	2OZ
EST-FS2835PW-60-24-Y(S)	6500K	890LM	<12W	94+	2OZ

S Type(Bendable)

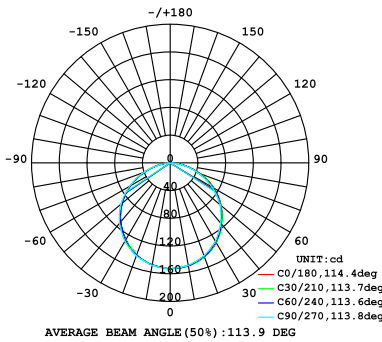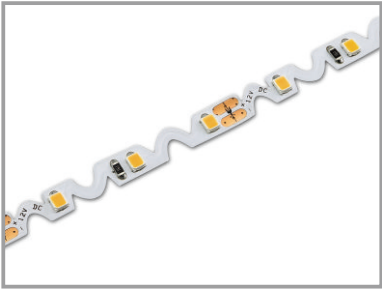

Strip length: CE: 300CM UL: 9.8FT(12V) | 9.8FT(24V)

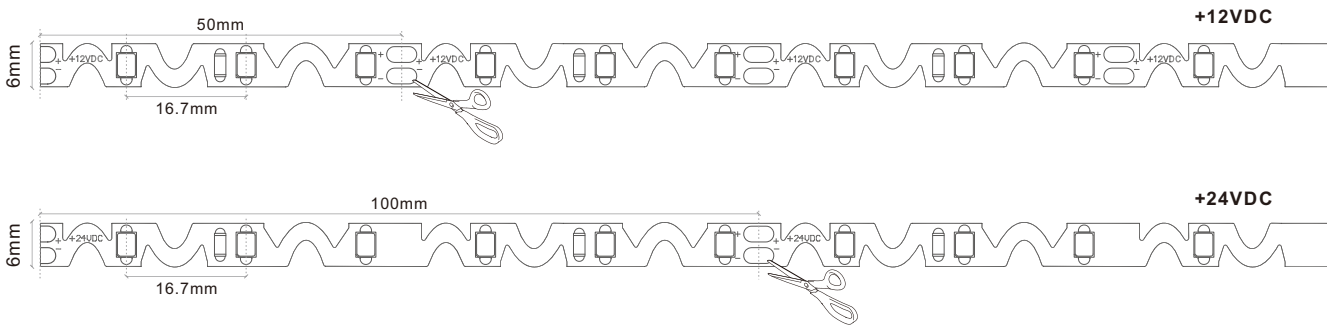


IP Rating:

- ☒ IP20---Non waterproof
- ☒ IP54---Nano coated


S Type(Bendable)

Part Number:EST-FS3528C-60-24-Y(S)
Part Number:EST-FS3528C-60-12-Y(S)

Model	Color temp. Wave lengths	LM/M	Power/M	CRI (Ra)	FPC copper
EST-FS3528WW-60-24-Y(S)	2700K	360LM	<4.8W	90+	2OZ
EST-FS3528WW-60-24-Y(S)	3000K	360LM	<4.8W	90+	2OZ
EST-FS3528WW-60-24-Y(S)	3500K	390LM	<4.8W	90+	2OZ
EST-FS3528NW-60-24-Y(S)	4000K	390LM	<4.8W	90+	2OZ
EST-FS3528NW-60-24-Y(S)	5000K	390LM	<4.8W	90+	2OZ
EST-FS3528PW-60-24-Y(S)	6500K	400LM	<4.8W	90+	2OZ
EST-FS3528R-60-24-Y(S)	620-625 NM NM	---	<4.8W	---	2OZ
EST-FS3528Y-60-24-Y(S)	585-590 NM NM	---	<4.8W	---	2OZ
EST-FS3528G-60-24-Y(S)	517-522 NM NM	---	<4.8W	---	2OZ
EST-FS3528B-60-24-Y(S)	465-470 NM NM	---	<4.8W	---	2OZ

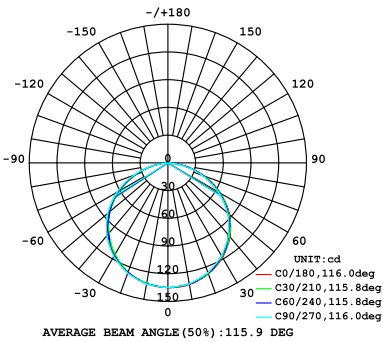

Strip length: CE: 500CM UL: 16.4FT(12V) | 16.4FT(24V)

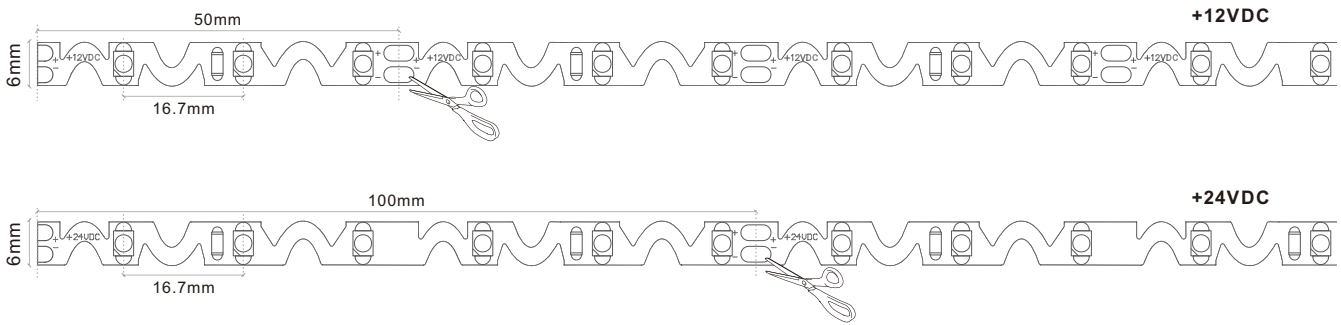



IP Rating:

- ☒ IP20---Non waterproof
- ☒ IP54---Nano coated


S Type(Bendable)

Part Number:EST-FS3535RGB-60-24-Y(S)

Model	Wave lengths	LM/M	Power/M	FPC copper
EST-FS3535RGB-60-24-Y(S)	620-627 NM NM	540LM	<14.4W	30Z
	625-530 NM NM			
	470-475 NM NM			

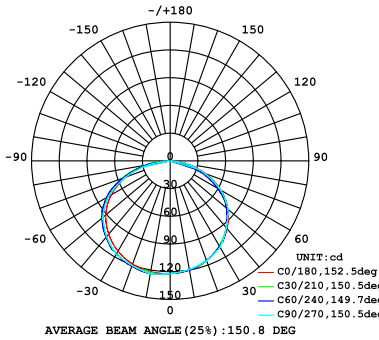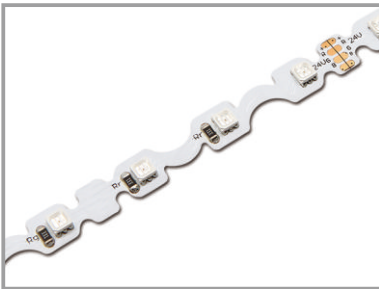

Strip length: CE: 500CM UL: 16.4FT

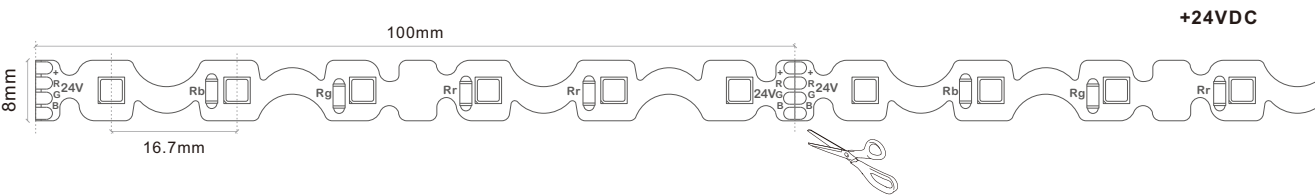

IP Rating:

- ☒ IP20---Non waterproof
- ☒ IP54---Nano coated

