


Super Slim

Slim 4mm LED Tape Light


Product Features

- 1. Slim 4mm LED tape light,use SMD2216 LED.
- 2. High light efficiency as 99LM/W for 7LEDs design and 85LM/W for 6LEDs design.
- 3. IP20 and IP54 protection.

EST-FS2216C-266H-24-Y

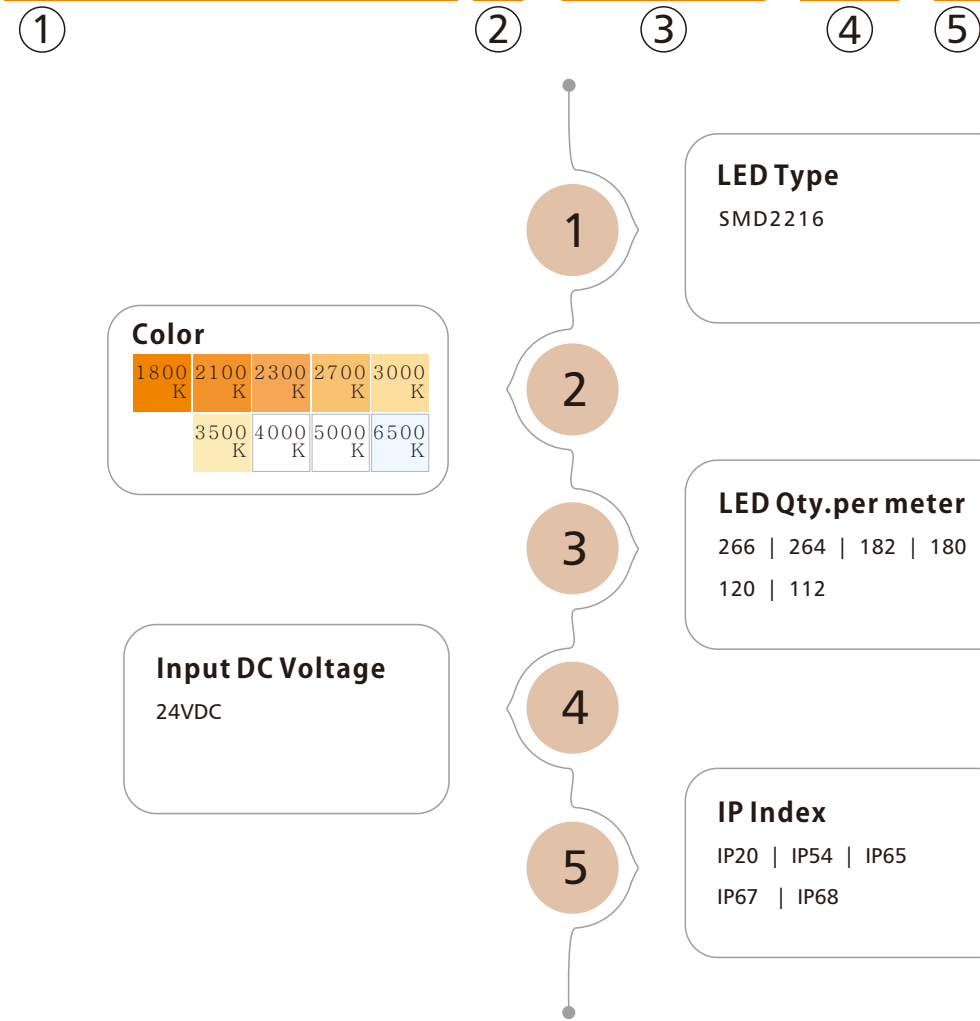


Model	Color temp.	Luminous Flux@20mA		I _F		CRI(Ra)
		Min.	Max.	Current	Max.	
	1800K	7LM	9LM	— —	20mA	90+
	2100K	7LM	9LM	— —	20mA	90+
	2300K	7LM	9LM	— —	20mA	90+
	2700K	7LM	9LM	— —	20mA	90+
	3000K	7LM	9LM	— —	20mA	90+
	3500K	7LM	9LM	— —	20mA	90+
	4000K	7LM	9LM	— —	20mA	90+
	5000K	7LM	9LM	— —	20mA	90+
	6500K	7LM	9LM	— —	20mA	90+

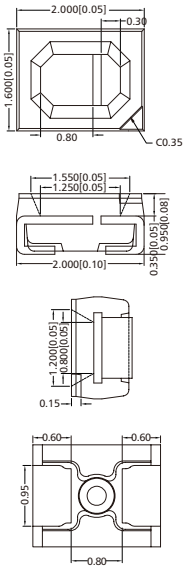


Part Number:EST-FS2216C-266H-24-Y

Model	Color temp.	LM/M	Power/M	Light efficiency	CRI (Ra)	FPC copper
EST-FS2216WW-266H-24-Y	1800K	950LM	<12W	79LM/W	90+	3OZ
EST-FS2216WW-266H-24-Y	2100K	1000LM	<12W	83LM/W	90+	3OZ
EST-FS2216WW-266H-24-Y	2300K	1000LM	<12W	83LM/W	90+	3OZ
EST-FS2216WW-266H-24-Y	2700K	1050LM	<12W	87LM/W	90+	3OZ
EST-FS2216WW-266H-24-Y	3000K	1050LM	<12W	87LM/W	90+	3OZ
EST-FS2216WW-266H-24-Y	3500K	1050LM	<12W	87LM/W	90+	3OZ
EST-FS2216NW-266H-24-Y	4000K	1200LM	<12W	100LM/W	90+	3OZ
EST-FS2216NW-266H-24-Y	5000K	1200LM	<12W	100LM/W	90+	3OZ
EST-FS2216PW-266H-24-Y	6500K	1200LM	<12W	100LM/W	90+	3OZ

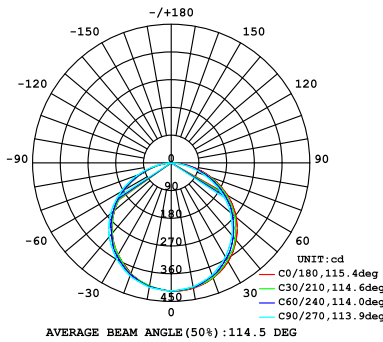

Strip length: CE:500CM UL:16.4FT

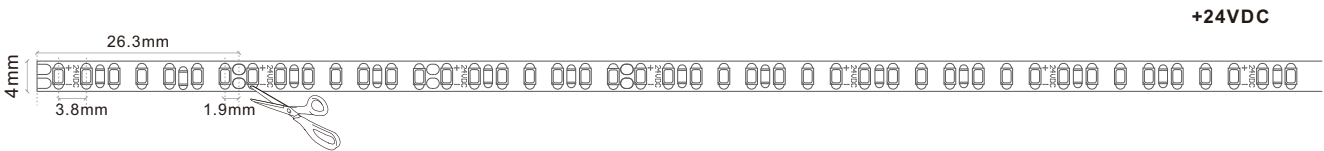


IP Rating:

- ☒ IP20---Non waterproof
- ☒ IP54---Nano coated




Part Number:EST-FS2216C-182H-24-Y

Model	Color temp.	LM/M	Power/M	Light efficiency	CRI (Ra)	FPC copper
EST-FS2216WW-182H-24-Y	1800K	690LM	<9W	76LM/W	90+	3OZ
EST-FS2216WW-182H-24-Y	2100K	720LM	<9W	80LM/W	90+	3OZ
EST-FS2216WW-182H-24-Y	2300K	720LM	<9W	80LM/W	90+	3OZ
EST-FS2216WW-182H-24-Y	2700K	780LM	<9W	86LM/W	90+	3OZ
EST-FS2216WW-182H-24-Y	3000K	780LM	<9W	86LM/W	90+	3OZ
EST-FS2216WW-182H-24-Y	3500K	780LM	<9W	86LM/W	90+	3OZ
EST-FS2216NW-182H-24-Y	4000K	850LM	<9W	94LM/W	90+	3OZ
EST-FS2216NW-182H-24-Y	5000K	850LM	<9W	94LM/W	90+	3OZ
EST-FS2216PW-182H-24-Y	6500K	850LM	<9W	94LM/W	90+	3OZ

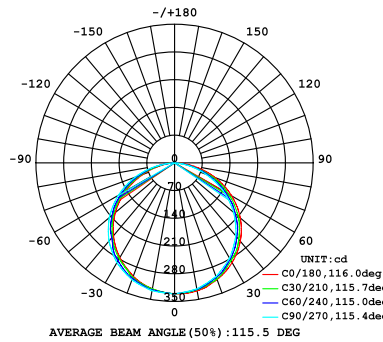

Strip length: CE:500CM UL:16.4FT

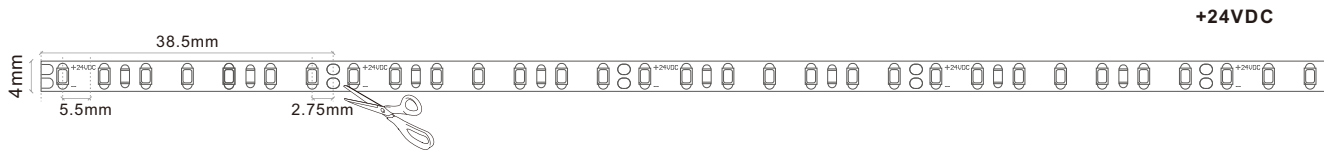


IP Rating:


- ☒ IP20---Non waterproof
- ☒ IP54---Nano coated



AL. profiles (mm)

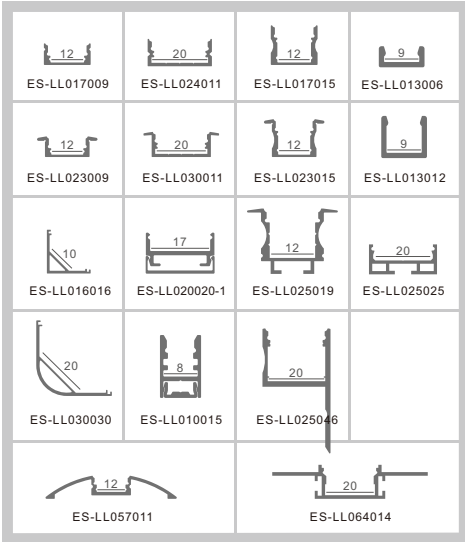


AL. profiles (mm)

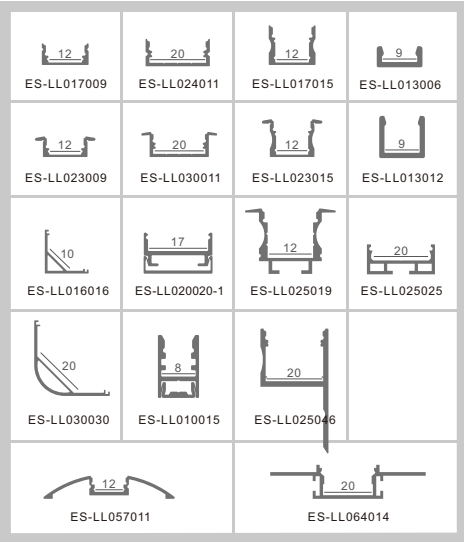


Part Number:EST-FS2216C-112H-24-Y

Model	Color temp.	LM/M	Power/M	Light efficiency	CRI (Ra)	FPC copper
EST-FS2216WW-112H-24-Y	1800K	570LM	<7.2W	79LM/W	90+	3OZ
EST-FS2216WW-112H-24-Y	2100K	600LM	<7.2W	83LM/W	90+	3OZ
EST-FS2216WW-112H-24-Y	2300K	600LM	<7.2W	83LM/W	90+	3OZ
EST-FS2216WW-112H-24-Y	2700K	620LM	<7.2W	86LM/W	90+	3OZ
EST-FS2216WW-112H-24-Y	3000K	620LM	<7.2W	86LM/W	90+	3OZ
EST-FS2216WW-112H-24-Y	3500K	620LM	<7.2W	86LM/W	90+	3OZ
EST-FS2216NW-112H-24-Y	4000K	680LM	<7.2W	94LM/W	90+	3OZ
EST-FS2216NW-112H-24-Y	5000K	680LM	<7.2W	94LM/W	90+	3OZ
EST-FS2216PW-112H-24-Y	6500K	680LM	<7.2W	94LM/W	90+	3OZ

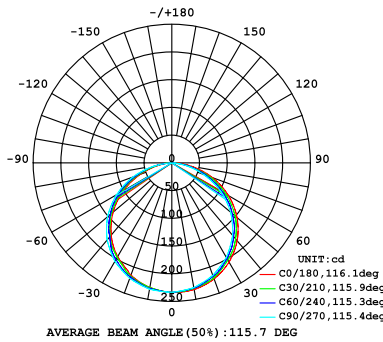

Strip length: CE:500CM UL:16.4FT

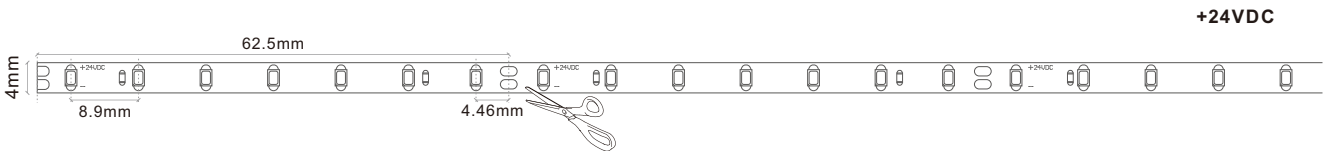

IP Rating:

- ☒ IP20---Non waterproof
- ☒ IP54---Nano coated





Super Slim 4mm


Super Slim 4mm

Part Number:EST-FS2216C-264-24-Y

Model	Color temp.	LM/M	Power/M	CRI (Ra)	FPC copper
EST-FS2216WW-264H-24-Y	1800K	850LM	<12W	90+	3OZ
EST-FS2216WW-264H-24-Y	2100K	900LM	<12W	90+	3OZ
EST-FS2216WW-264H-24-Y	2300K	900LM	<12W	90+	3OZ
EST-FS2216WW-264H-24-Y	2700K	952LM	<12W	90+	3OZ
EST-FS2216WW-264H-24-Y	3000K	952LM	<12W	90+	3OZ
EST-FS2216WW-264H-24-Y	3500K	952LM	<12W	90+	3OZ
EST-FS2216NW-264H-24-Y	4000K	980LM	<12W	90+	3OZ
EST-FS2216NW-264H-24-Y	5000K	980LM	<12W	90+	3OZ
EST-FS2216PW-264H-24-Y	6500K	1010LM	<12W	90+	3OZ

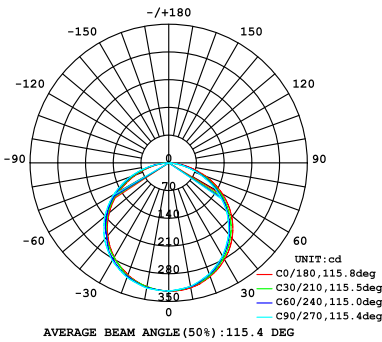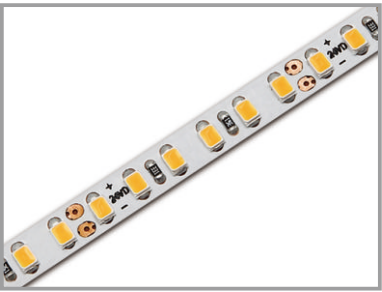

Strip length: CE:500CM UL:16.4FT

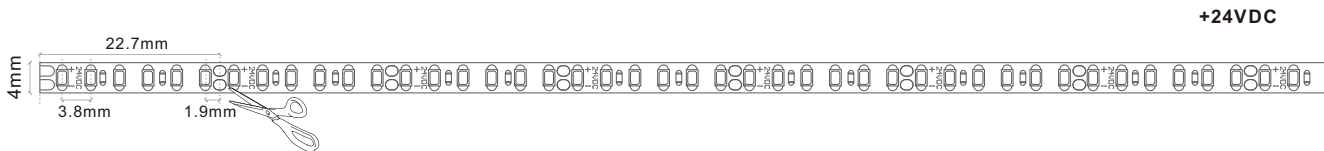


IP Rating:

- ☒ IP20---Non waterproof
- ☒ IP54---Nano coated




AL. profiles (mm)

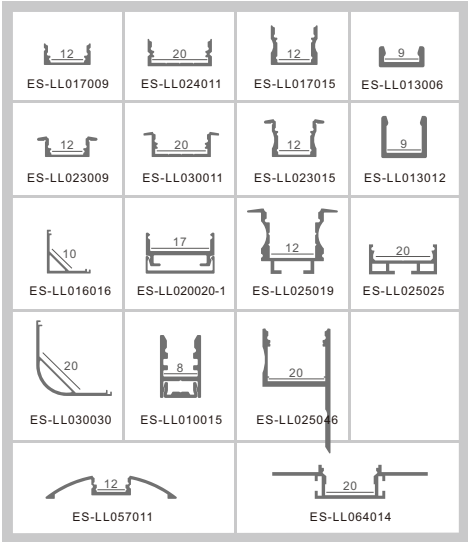


Part Number:EST-FS2216C-180-24-Y

Model	Color temp.	LM/M	Power/M	CRI (Ra)	FPC copper
EST-FS2216WW-180-24-Y	1800K	600LM	<9W	90+	3OZ
EST-FS2216WW-180-24-Y	2100K	630LM	<9W	90+	3OZ
EST-FS2216WW-180-24-Y	2300K	630LM	<9W	90+	3OZ
EST-FS2216WW-180-24-Y	2700K	680LM	<9W	90+	3OZ
EST-FS2216WW-180-24-Y	3000K	680LM	<9W	90+	3OZ
EST-FS2216WW-180-24-Y	3500K	680LM	<9W	90+	3OZ
EST-FS2216NW-180-24-Y	4000K	760LM	<9W	90+	3OZ
EST-FS2216NW-180-24-Y	5000K	760LM	<9W	90+	3OZ
EST-FS2216PW-180-24-Y	6500K	778LM	<9W	90+	3OZ

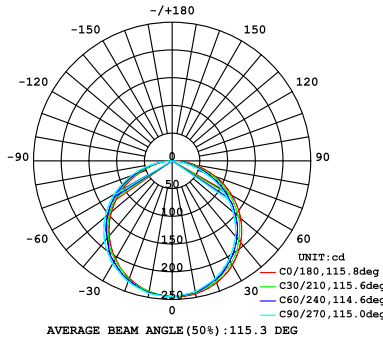

Strip length: CE:500CM UL:16.4FT

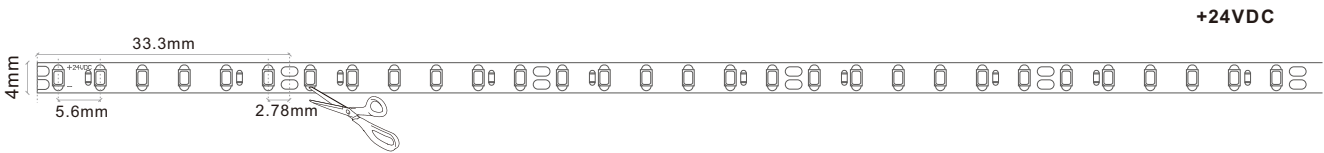



IP Rating:

- ☒ IP20---Non waterproof
- ☒ IP54---Nano coated




Part Number:EST-FS2216C-120-24-Y

Model	Color temp.	LM/M	Power/M	CRI (Ra)	FPC copper
EST-FS2216WW-120-24-Y	1800K	500LM	<7.2W	90+	3OZ
EST-FS2216WW-120-24-Y	2100K	540LM	<7.2W	90+	3OZ
EST-FS2216WW-120-24-Y	2300K	540LM	<7.2W	90+	3OZ
EST-FS2216WW-120-24-Y	2700K	573LM	<7.2W	90+	3OZ
EST-FS2216WW-120-24-Y	3000K	573LM	<7.2W	90+	3OZ
EST-FS2216WW-120-24-Y	3500K	573LM	<7.2W	90+	3OZ
EST-FS2216NW-120-24-Y	4000K	600LM	<7.2W	90+	3OZ
EST-FS2216NW-120-24-Y	5000K	600LM	<7.2W	90+	3OZ
EST-FS2216PW-120-24-Y	6500K	620LM	<7.2W	90+	3OZ

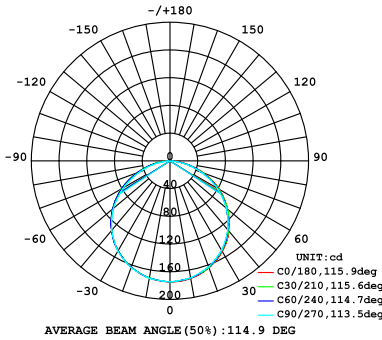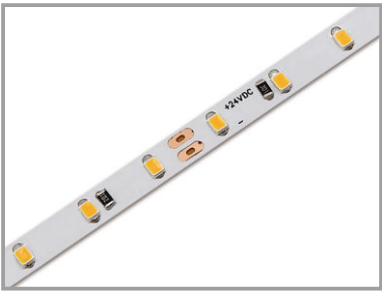

Strip length: CE:500CM UL:16.4FT

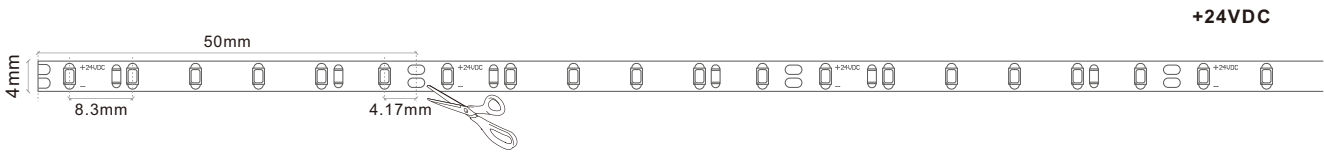

IP Rating:

- ☒ IP20---Non waterproof
- ☒ IP54---Nano coated

