


Neon Flex 360° NEW

- 360° uniform round-glowing design, applicable to space decoration lighting.
- IP65, suitable for rainy environment.
- Pendant and surface mounted are achievable.



RLLR25 NEW

- 360° uniform round-glowing design, applicable to space decoration lighting.
- High luminous efficiency, LM80 proved.
- Silicone extrusion molding technology, IP65.
- Pendant and surface mounted are achievable.
- 3 years warranty, life span over 36000 hours.

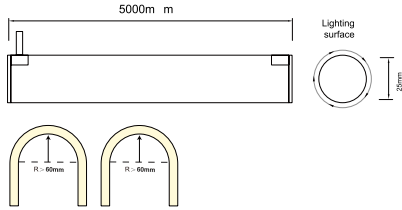

24V
DC

5m
REEL

Basic Parameters

Size	5000 ×φ 25mm
Cutting unit	41.66mm
Input voltage	24VDC
Input current	0.6A/m
Typ.power	14.4W/m
Max.power	16W/m
Bend radius	> 60mm


Recommended Accessories

PC Carrier	L: 1000mm , With screws	
PC Clip	L: 25mm , With screws	
End cap set	One end cap+one plug	
End cap set	One end cap+one plug	
Pendant cable	Accessories for hanging lifting	

Photo-electric Parameters

CRI	CCT	LM/m	LM/W
>80/90	2300 K	900	62
	2700 K	950	66
	3000 K	950	66
	4000 K	900	62

1. The above parameters are tested based on 1M standard products;
2. The power and luminous flux are allowed to have an error range of ±10%;
3. The above parameters are typical values;



Height	Eavg,Emax	Angle:111.76deg	Diameter
1m	59.49,163.2lx		295.20cm
2m	14.87,40.79lx		590.4cm
3m	6.610,18.13lx		885.59cm
5m	2.379,6.527lx		1475.99cm
7m	1.241,3.330lx		2066.38cm

Ordering Code

Category	Series	Bending direction	Section Size	CRI	CCT	Voltage	Silk Printing	Entry Cable	Wire Type	Wire Length	Brand Code	Label Type	LED Strip Length										
Silicone neon strip	N	Domed Neon	N	360	R	φ25mm 25	-	8	Ra>80	2300K	LW	24V 24	C	Dual-ends	D	PVC	N	500mm	050	C	C	5M	0500
									Ra>90	2700K	SW	Customized	S	One end	S	Silica	S	Package for distributors	B	Customized	S		
										3000K	WW	Neutral screen	N	No	X								
										4000K	NW												
	N	N	R			25	-	8		NW	24	C	S	N		050	C	C		0500			

