


EST-FS3535RGBWW-96-24-Y

① ② ③ ④ ⑤ ⑥ ⑦

RGB+W+WW

Product Features

1. Low-voltage 24VDC.
2. RGB color changing and CCT adjustable in one LED tape light.
3. RGB+W+WW:seperated LEDs and RGB+W+WW:5 chips in 1 for option.

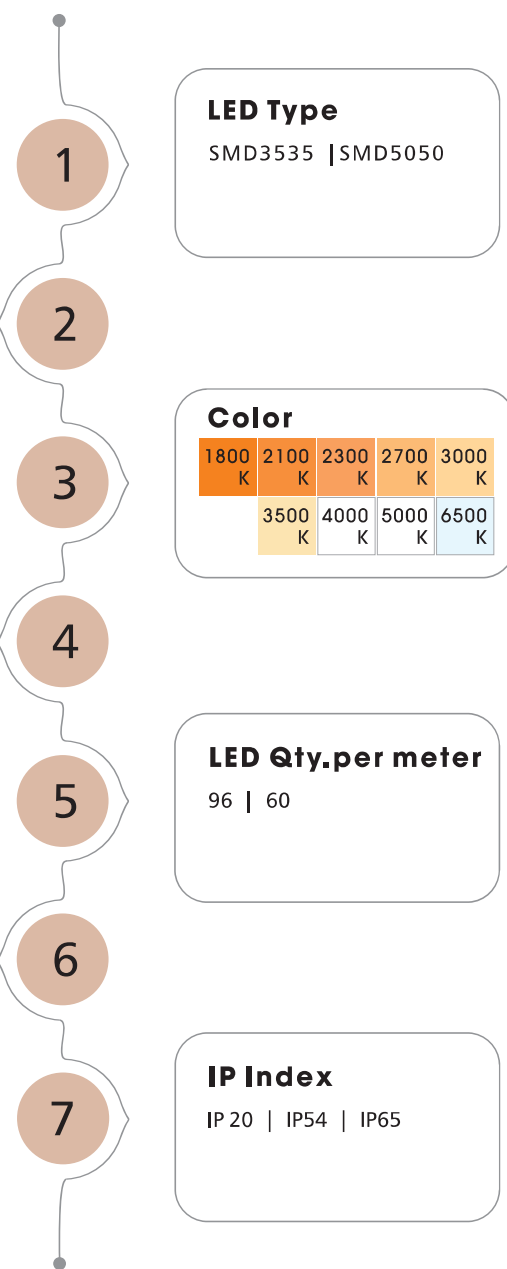

Color

620-627 NM NM	
525-530 NM NM	470-475 NM NM

Tunable CCT

2700-6500 K K

Input DC Voltage

24VDC

LED Type

SMD3535 | SMD5050

Color

1800 K	2100 K	2300 K	2700 K	3000 K
	3500 K	4000 K	5000 K	6500 K

LED Qty.per meter

96 | 60

IP Index

IP 20 | IP54 | IP65

RGBWW Series


Part Number: EST-FS3535RGBWW-96-24-Y

Model	Wave lengths Color temp.	LM/M	Power/M	LED/M	FPC copper
ES-FS3535RGBWW-96-24-Y	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="background-color: #0000FF; width: 10px; height: 10px; margin-bottom: 2px;"></div> RGB </div> <div style="display: flex; flex-direction: column; align-items: center;"> <div style="background-color: #FF0000; width: 10px; height: 10px; margin-bottom: 2px;"></div> 1800-6500 K </div> <div style="display: flex; flex-direction: column; align-items: center;"> <div style="background-color: #00FF00; width: 10px; height: 10px; margin-bottom: 2px;"></div> 1800-6500 K </div>	1100LM	<23W	96LEDs(RGB) 96LEDs(WHITE) 96LEDs(WARM WHITE)	3OZ




Controller

Product No.	Description
100102010103	12-24VDC 3A*5CH Max.15A 5CH*(36-72)W

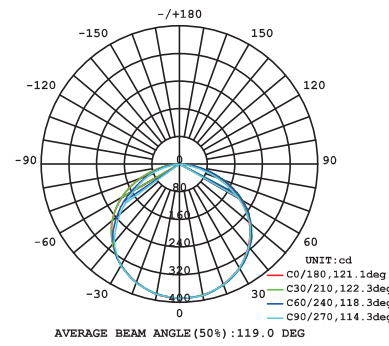

Strip length: CE:500CM UL:13.12FT

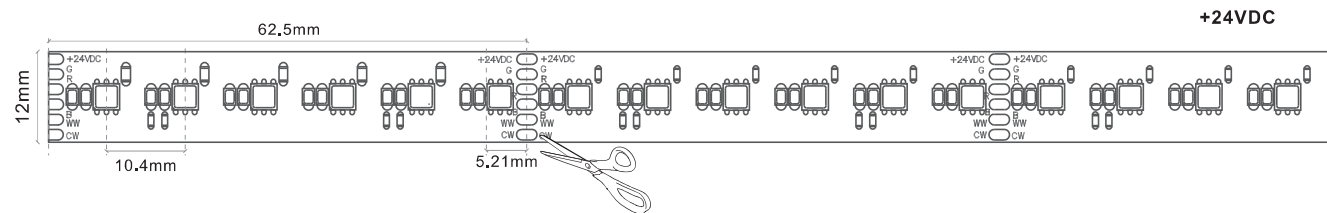

IP Rating:

- IP20---Non waterproof
- IP54---Nano coated
- IP65---Silicon coated
- IP67---Silicon coated & Wrapped heat shrink tube
- IP67---Silicon extrusion
- IP67---Silicon tube(transparent)
- IP68---Silicon tube(transparent) & Inject silicon glue

AL. profiles (mm)

ES-LL017009	ES-LL024011	ES-LL017015	ES-LL013006
ES-LL023009	ES-LL030011	ES-LL023015	ES-LL013012
ES-LL016016	ES-LL020020-1	ES-LL016015	ES-LL025025
ES-LL030030	ES-LL010015	ES-LL020020	
ES-LL018018	ES-LL010010		

RGBWW Series


Part Number: EST-FS5050RGBWW-96-24-Y

Model	Wave lengths Color temp.	LM/M	Power/M	LED/M	CRI (Ra)	FPC copper
ES-FS5050RGBWW-96-24-Y	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="background-color: #0000FF; width: 10px; height: 10px; margin-bottom: 2px;"></div> RGB </div> <div style="display: flex; flex-direction: column; align-items: center;"> <div style="background-color: #FF0000; width: 10px; height: 10px; margin-bottom: 2px;"></div> 2300K </div> <div style="display: flex; flex-direction: column; align-items: center;"> <div style="background-color: #00FF00; width: 10px; height: 10px; margin-bottom: 2px;"></div> 6500K </div>	1572LM	<23W	96LEDs	90+	3OZ




Controller

Product No.	Description
100102010103	12-24VDC 3A*5CH Max.15A 5CH*(36-72)W

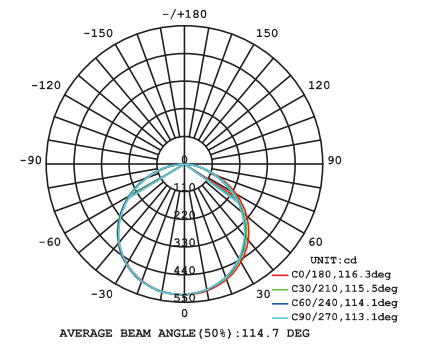

Strip length: CE:500CM UL:13.12FT

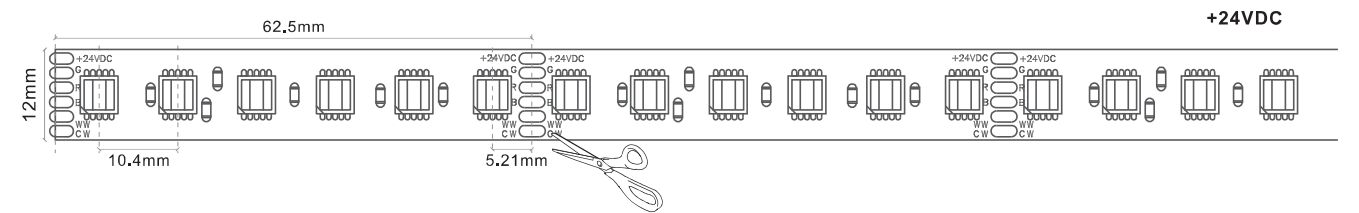

IP Rating:


- IP20---Non waterproof
- IP54---Nano coated
- IP65---Silicon coated
- IP67---Silicon coated & Wrapped heat shrink tube
- IP67---Silicon extrusion
- IP67---Silicon tube(transparent)
- IP68---Silicon tube(transparent) & Inject silicon glue

AL. profiles (mm)

ES-LL017009	ES-LL024011	ES-LL017015	ES-LL013006
ES-LL023009	ES-LL030011	ES-LL023015	ES-LL013012
ES-LL016016	ES-LL020020-1	ES-LL016015	ES-LL025025
ES-LL030030	ES-LL010015	ES-LL020020	
ES-LL018018	ES-LL010010		


Part Number: EST-FS5050RGBWW-60-24-Y

Model	Wave lengths Color temp.	LM/M	Power/M	LED/M	CRI (Ra)	FPC copper
ES-FS5050RGBWW-60-24-Y	RGB	1258LM	<23W	60LEDs	90+	3OZ
	2300K					
	6500K					

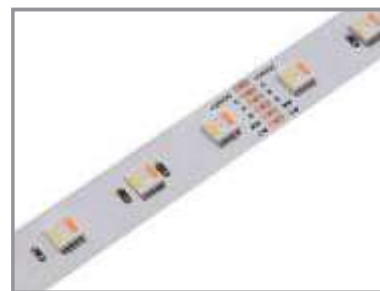


Controller

Product No.	Description
100102010103	12-24VDC 3A*5CH Max.15A 5CH*(36-72)W

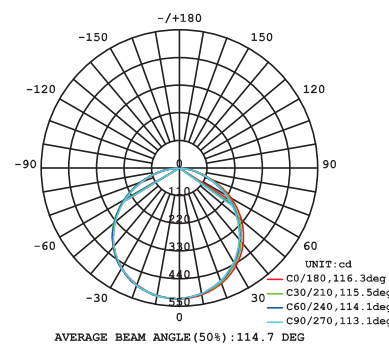


Strip length: CE:500CM UL:13.12FT

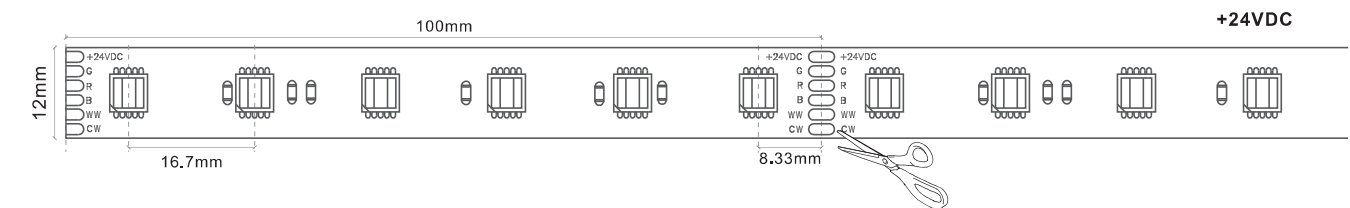

IP Rating:

- IP20---Non waterproof
- IP54---Nano coated
- IP65---Silicon coated
- IP67---Silicon coated & Wrapped heat shrink tube
- IP67---Silicon extrusion
- IP67---Silicon tube(transparent)
- IP68---Silicon tube(transparent) & Inject silicon glue



AL. profiles (mm)

ES-LL017009	ES-LL024011	ES-LL017015	ES-LL013006
ES-LL023009	ES-LL030011	ES-LL023015	ES-LL013012
ES-LL016016	ES-LL020020-1	ES-LL016015	ES-LL025025
ES-LL030030	ES-LL010015	ES-LL020020	
ES-LL018018		ES-LL010010	

